
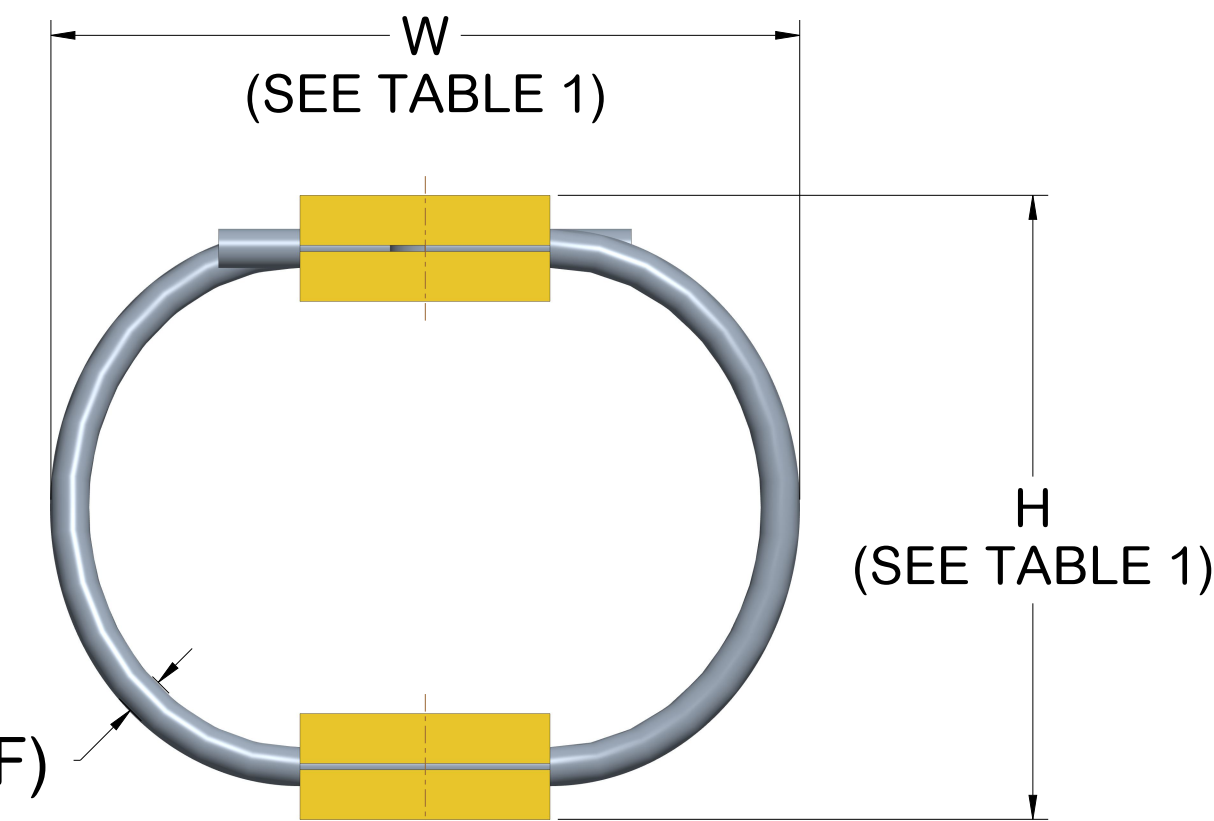
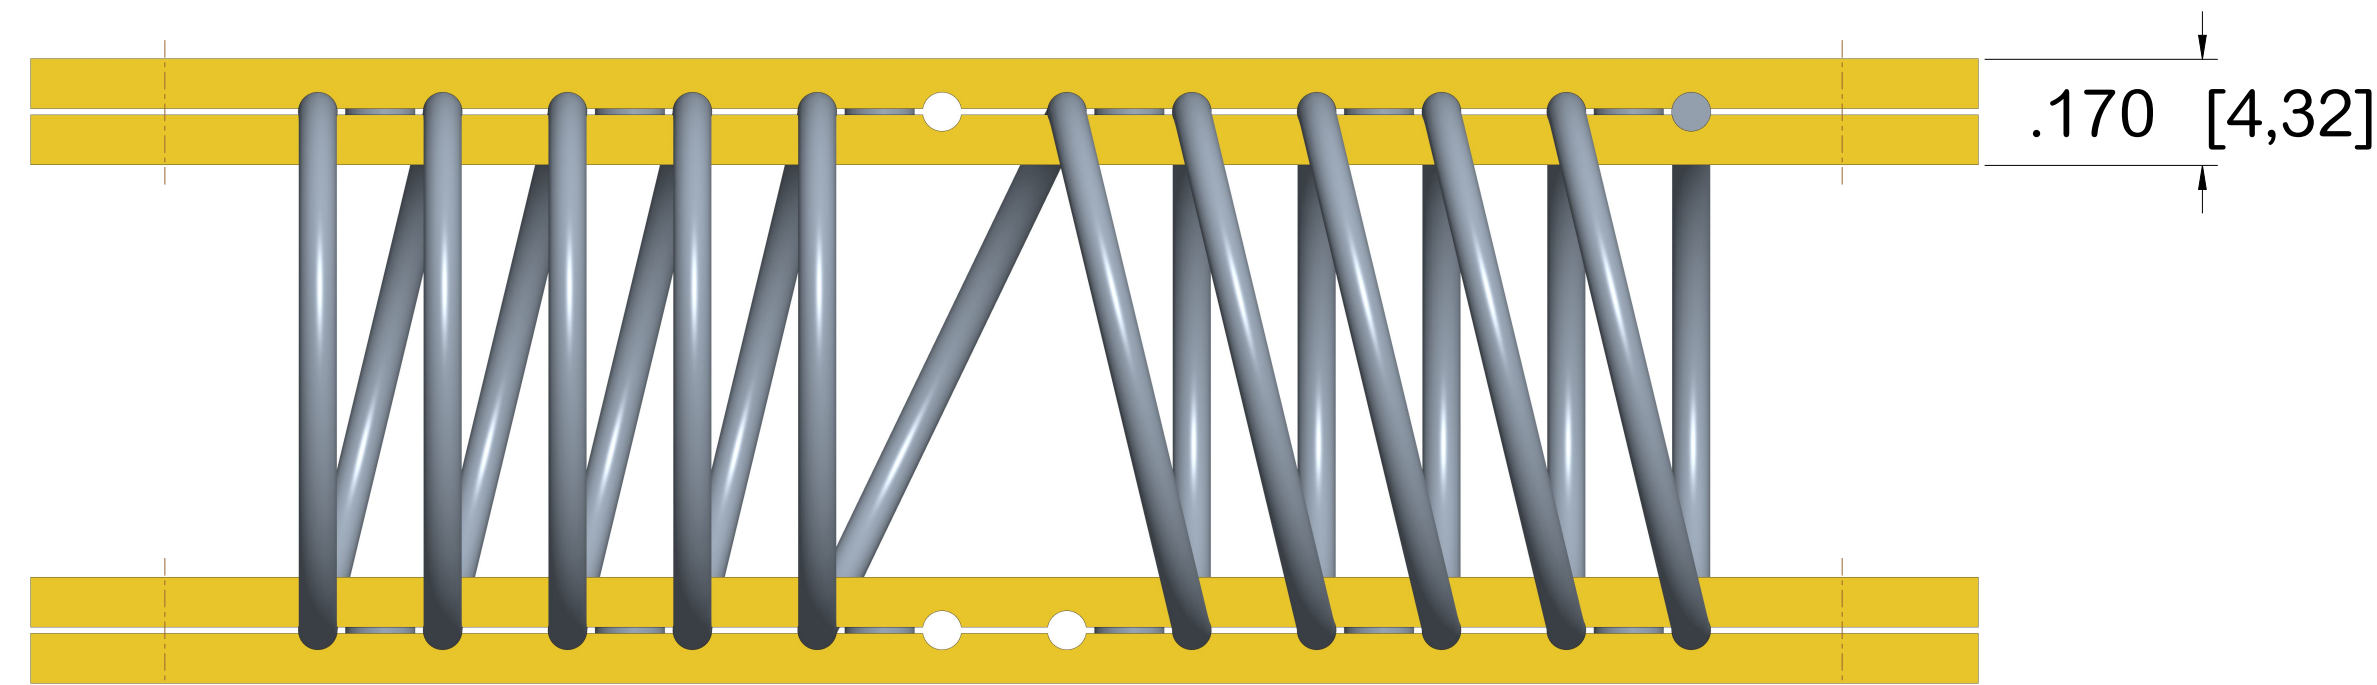


1/16" DIAMETER CABLE

HELICAL ISOLATOR

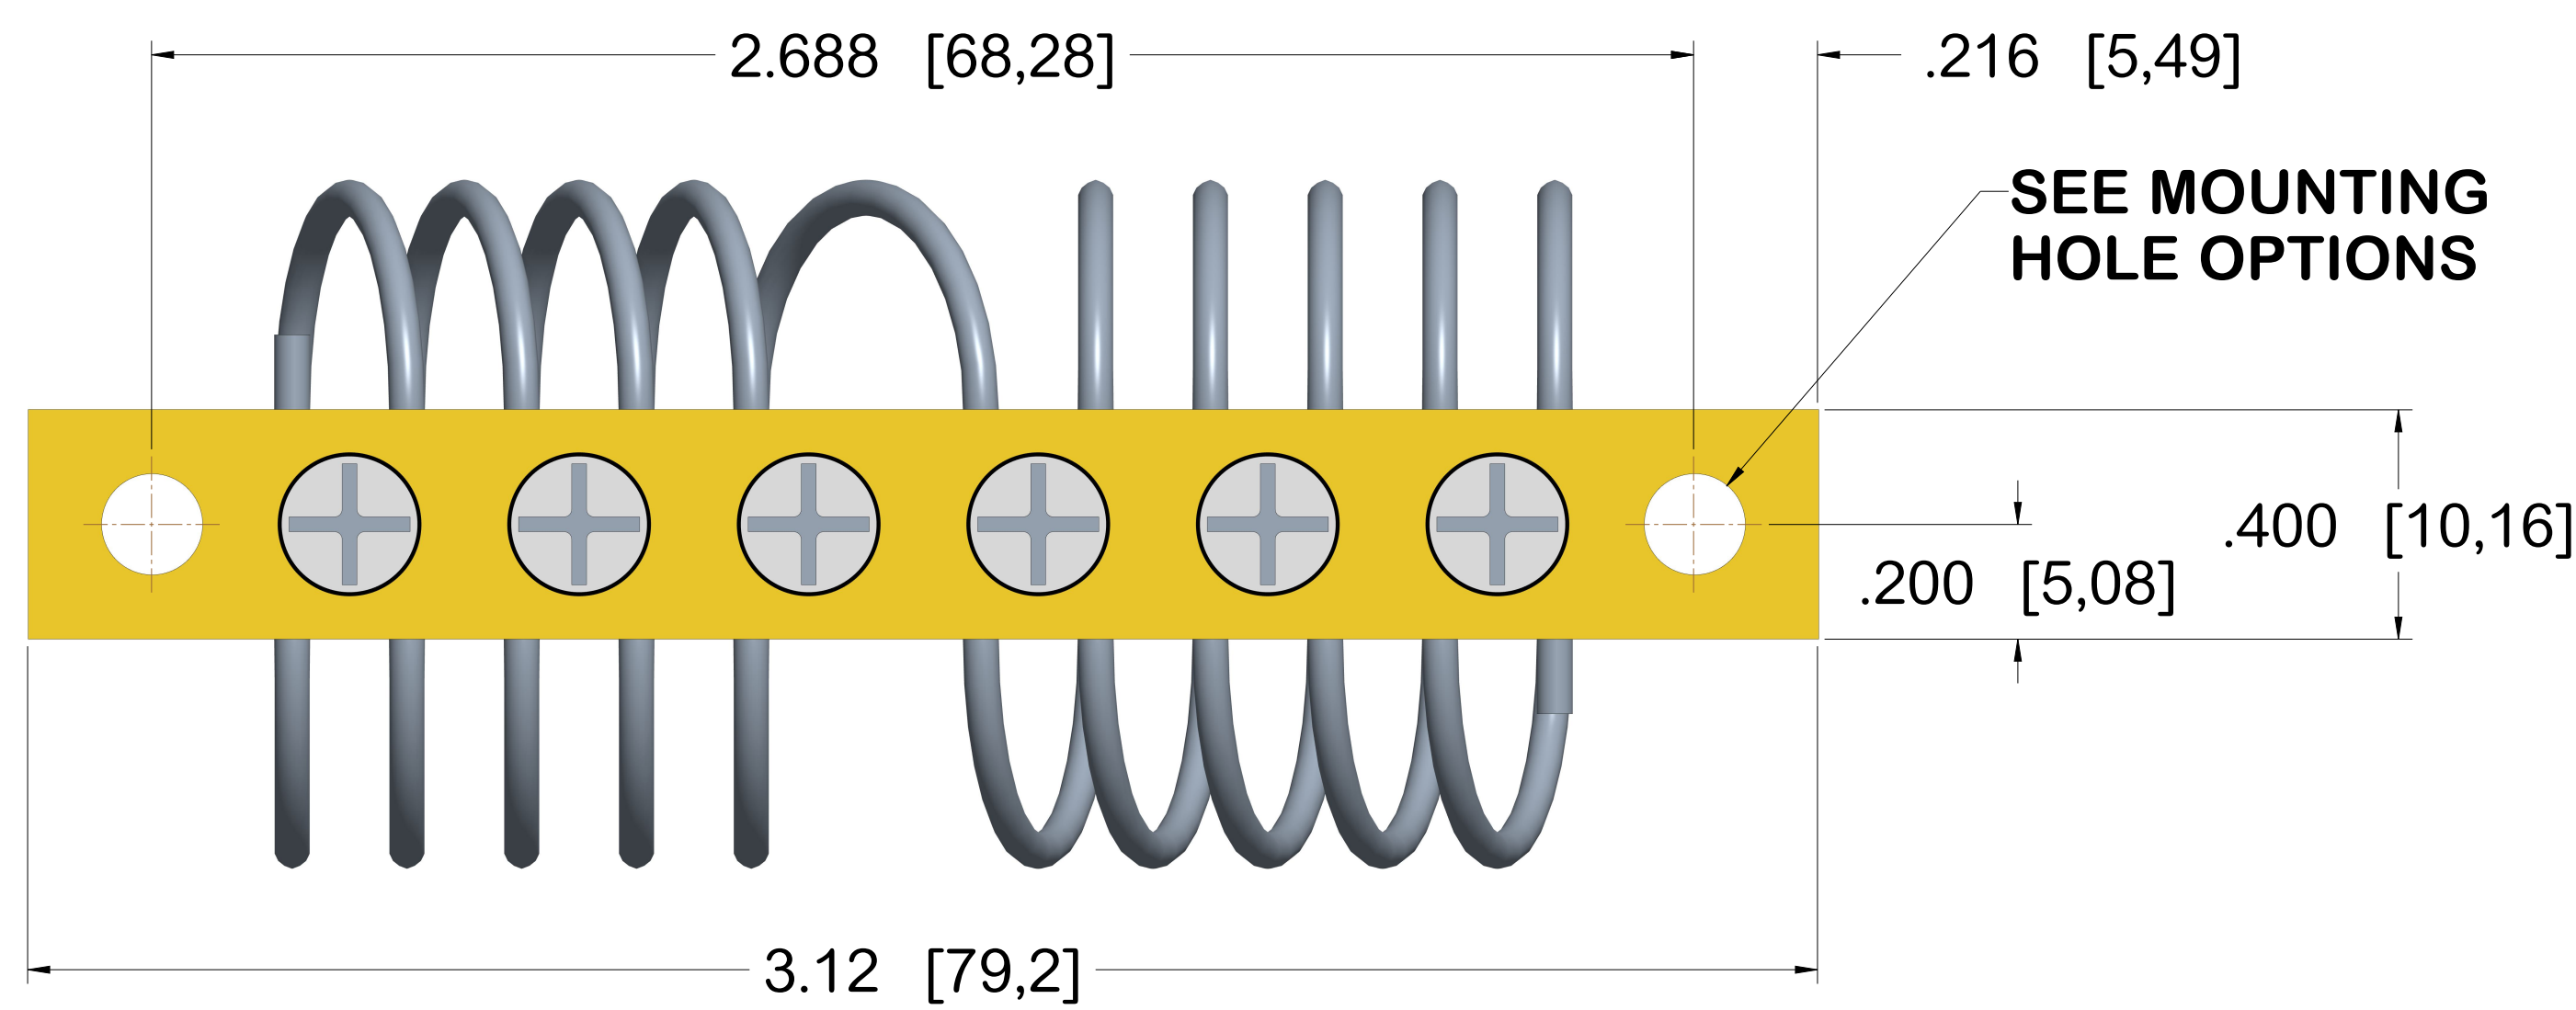

PART NUMBER	DIMENSIONS in(mm)		ISOLATOR WEIGHT oz (gms)	COMPRESSION			SHEAR/ROLL (AVG)		
	H	W		KV (VIBE) (lbs/in)	KS (SHOCK) (lbs/in)	MAX. DEFLECT. (in)	KV (VIBE) (lbs/in)	KS (SHOCK) (lbs/in)	MAX. DEFLECT. (in)
M2-070-10-[]	0.70 (17,8)	1.00 (25,4)	0.7 (20)	99	80	.30	32	57	.30
M2-080-10-[]	0.80 (20,3)	1.10 (27,9)	0.8 (23)	83	70	.40	28	50	.40
M2-100-10-[]	1.00 (25,4)	1.20 (30,5)	0.9 (26)	46	37	.60	11	27	.60
M2-110-10-[]	1.10 (27,9)	1.30 (33,0)	1.0 (28)	30	23	.70	8	24	.70
M2-120-10-[]	1.20 (30,5)	1.40 (35,6)	1.1 (31)	24	18	.72	6	20	.72
M2-130-10-[]	1.30 (33,0)	1.50 (38,1)	1.2 (34)	20	14	.90	4	18	.90

NOTES, FEATURES, MATERIALS/FINISHES

NOTES:

- ° ALL DIMENSIONS ARE FOR REFERENCE ONLY
- ° ALL DIMENSIONS IN PARENTHESIS ARE METRIC (mm)
- ° SPECIALS AVAILABLE UPON REQUEST (MATERIALS, SIZE, MOUNTING HOLES, FINISH, ETC...)
- ° ADD 1.08oz (.03kg) TO ISOLATOR WEIGHT FOR ALL STAINLESS STEEL VERSIONS

FEATURES:

- ° RUGGED ALL METAL CONSTRUCTION
- ° UNEQUALLED TEMP. RANGE: -200° F TO 500° F
- ° THREE AXIS CAPABILITY (6 DOF)
- ° FAIL SAFE CONSTRUCTION
- ° HIGH DAMPING: C/Cc .15-.20
- ° LONG LIFE AND MAINTENANCE FREE

MATERIALS/FINISHES:

- ° CABLE: 300 SERIES SS PER MIL-W-83420 OR RR-W-410
- ° SCREWS: 300 SERIES SS PER MS51959-12
- ° INSERTS: 300 SERIES SS (ALUM BARS ONLY)
- ° RETAINER BARS: SEE BELOW

MODEL NUMBER EXAMPLE

M2 - 110 - 10 - - A

MOUNTING HOLES

- ° SEE MOUNTING HOLE OPTIONS.
- ° ADD 'M' TO END OF P/N FOR METRIC MOUNTING HOLES.
- ° ADD 'L' TO END OF P/N FOR LOCKING INSERTS. (N/A FOR SS BARS).

BAR MATERIAL/FINISH

- ° []= 6061-T6 ALUM ALLOY/CHEM FILM IAW MIL-DTL-5541, TYPE II, CLASS III.
- ° [H]= 6061-T6 ALUM ALLOY/ANODIZED IAW MIL-A-8625, TYPE II, CLASS I.
- ° [S]= 300 SERIES SS/PASSIVATED IAW ASTM A967.

NO. OF LOOPS

- ° ISOLATOR SPRING RATES ARE DIRECTLY PROPORTIONAL TO NO. OF CABLE LOOPS.







MODEL SIZE

- ° BASED ON ISOLATOR HEIGHT.

SERIES



- ° CABLE DIAMETER IN 32NDS.

MOUNTING HOLE OPTIONS

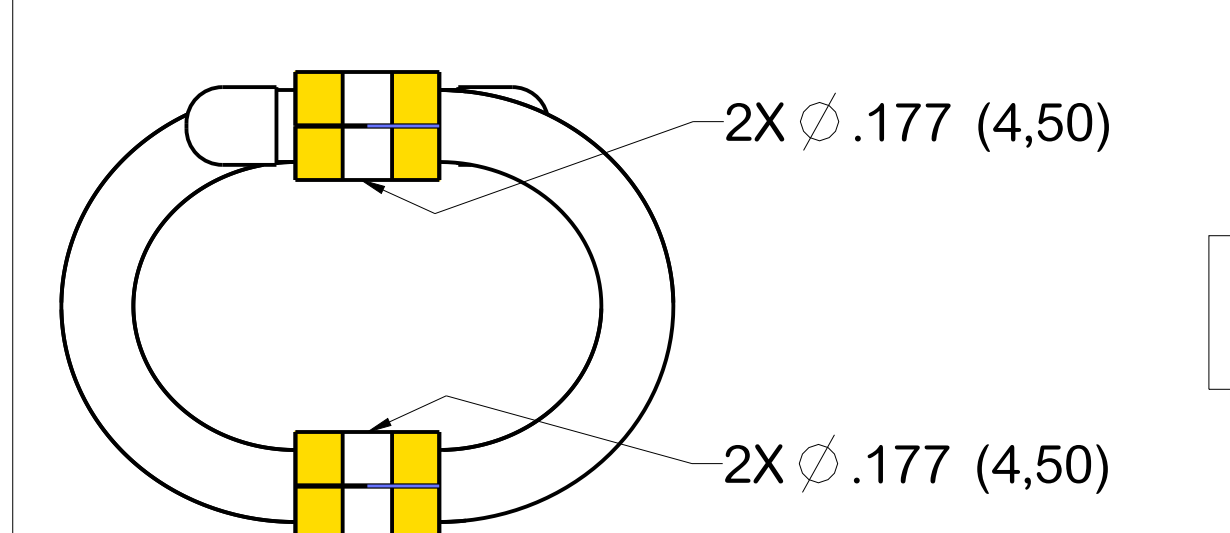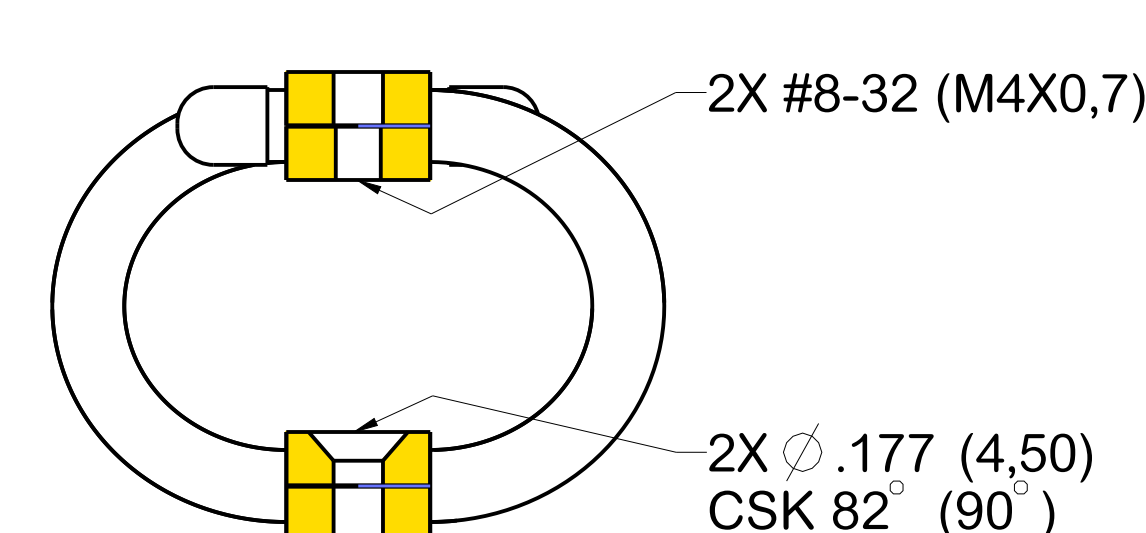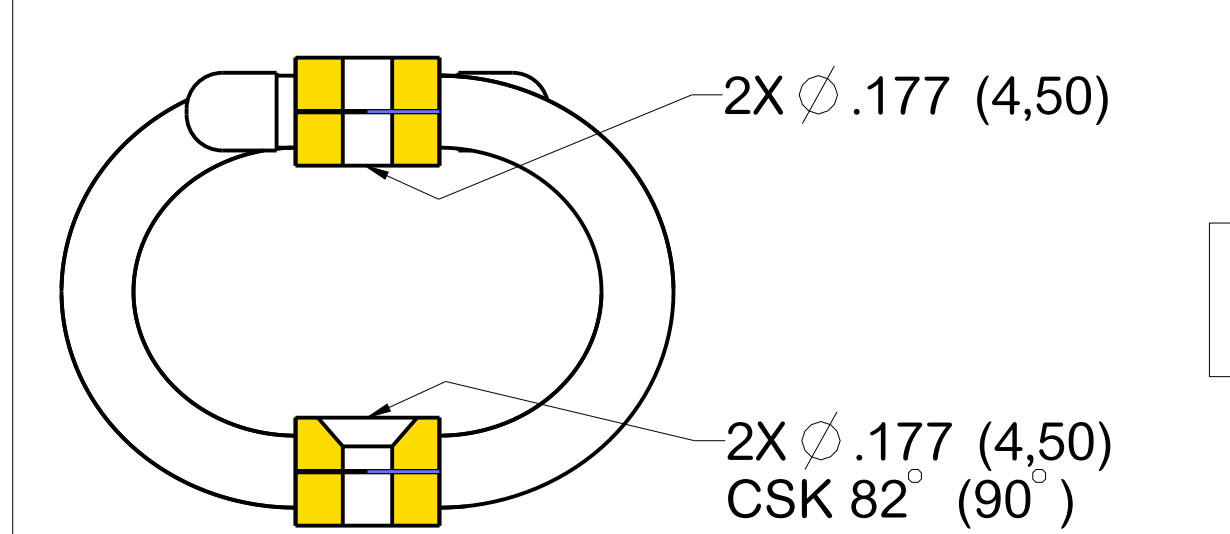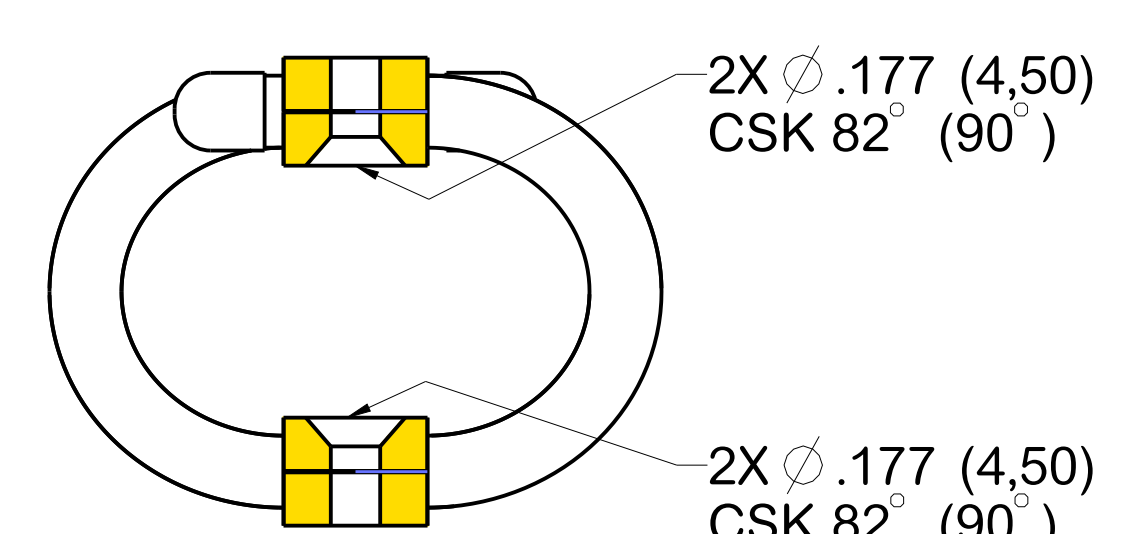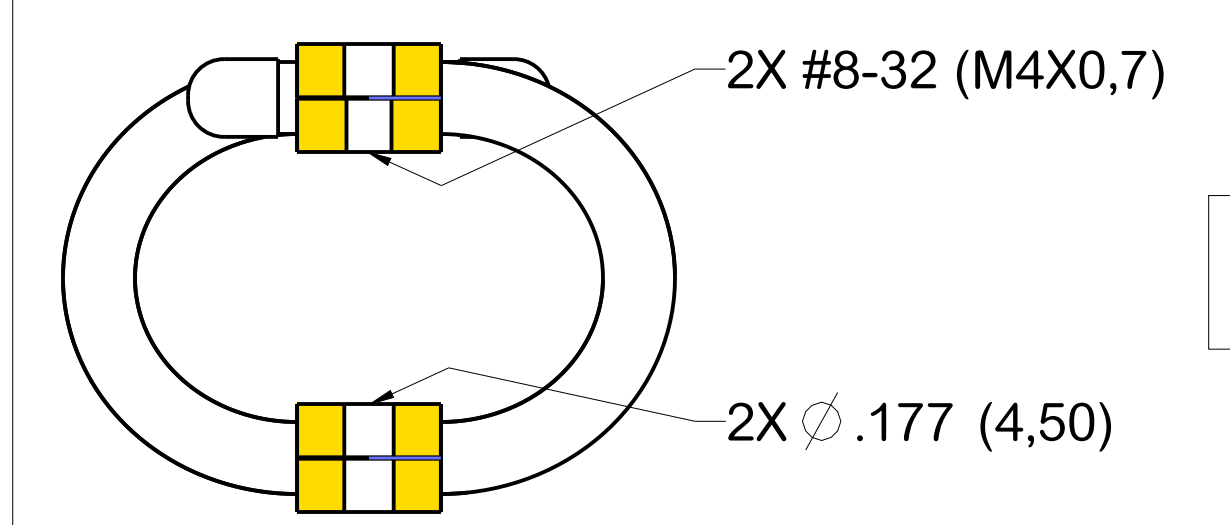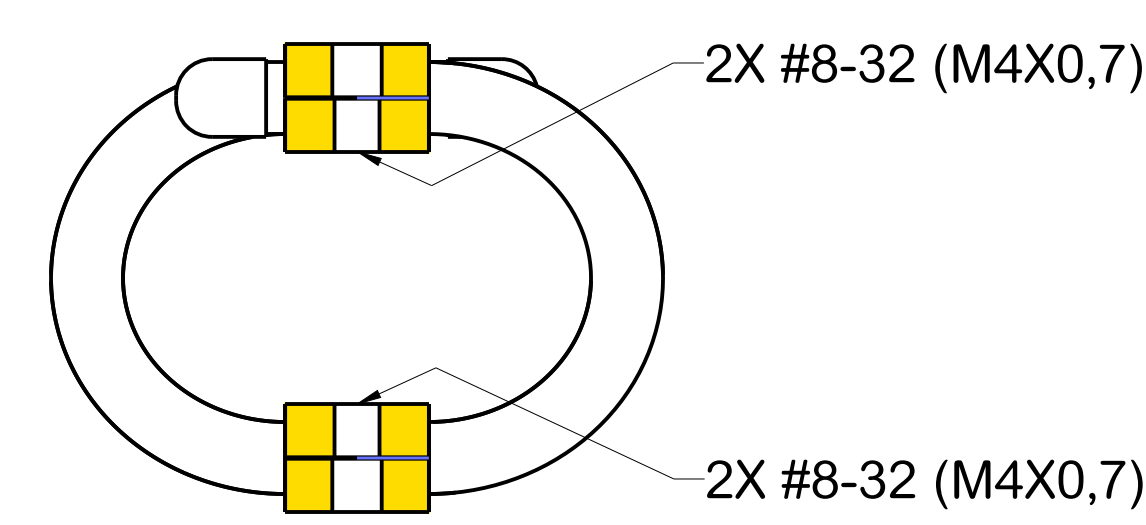



1/16" DIAMETER CABLE

HELICAL ISOLATOR

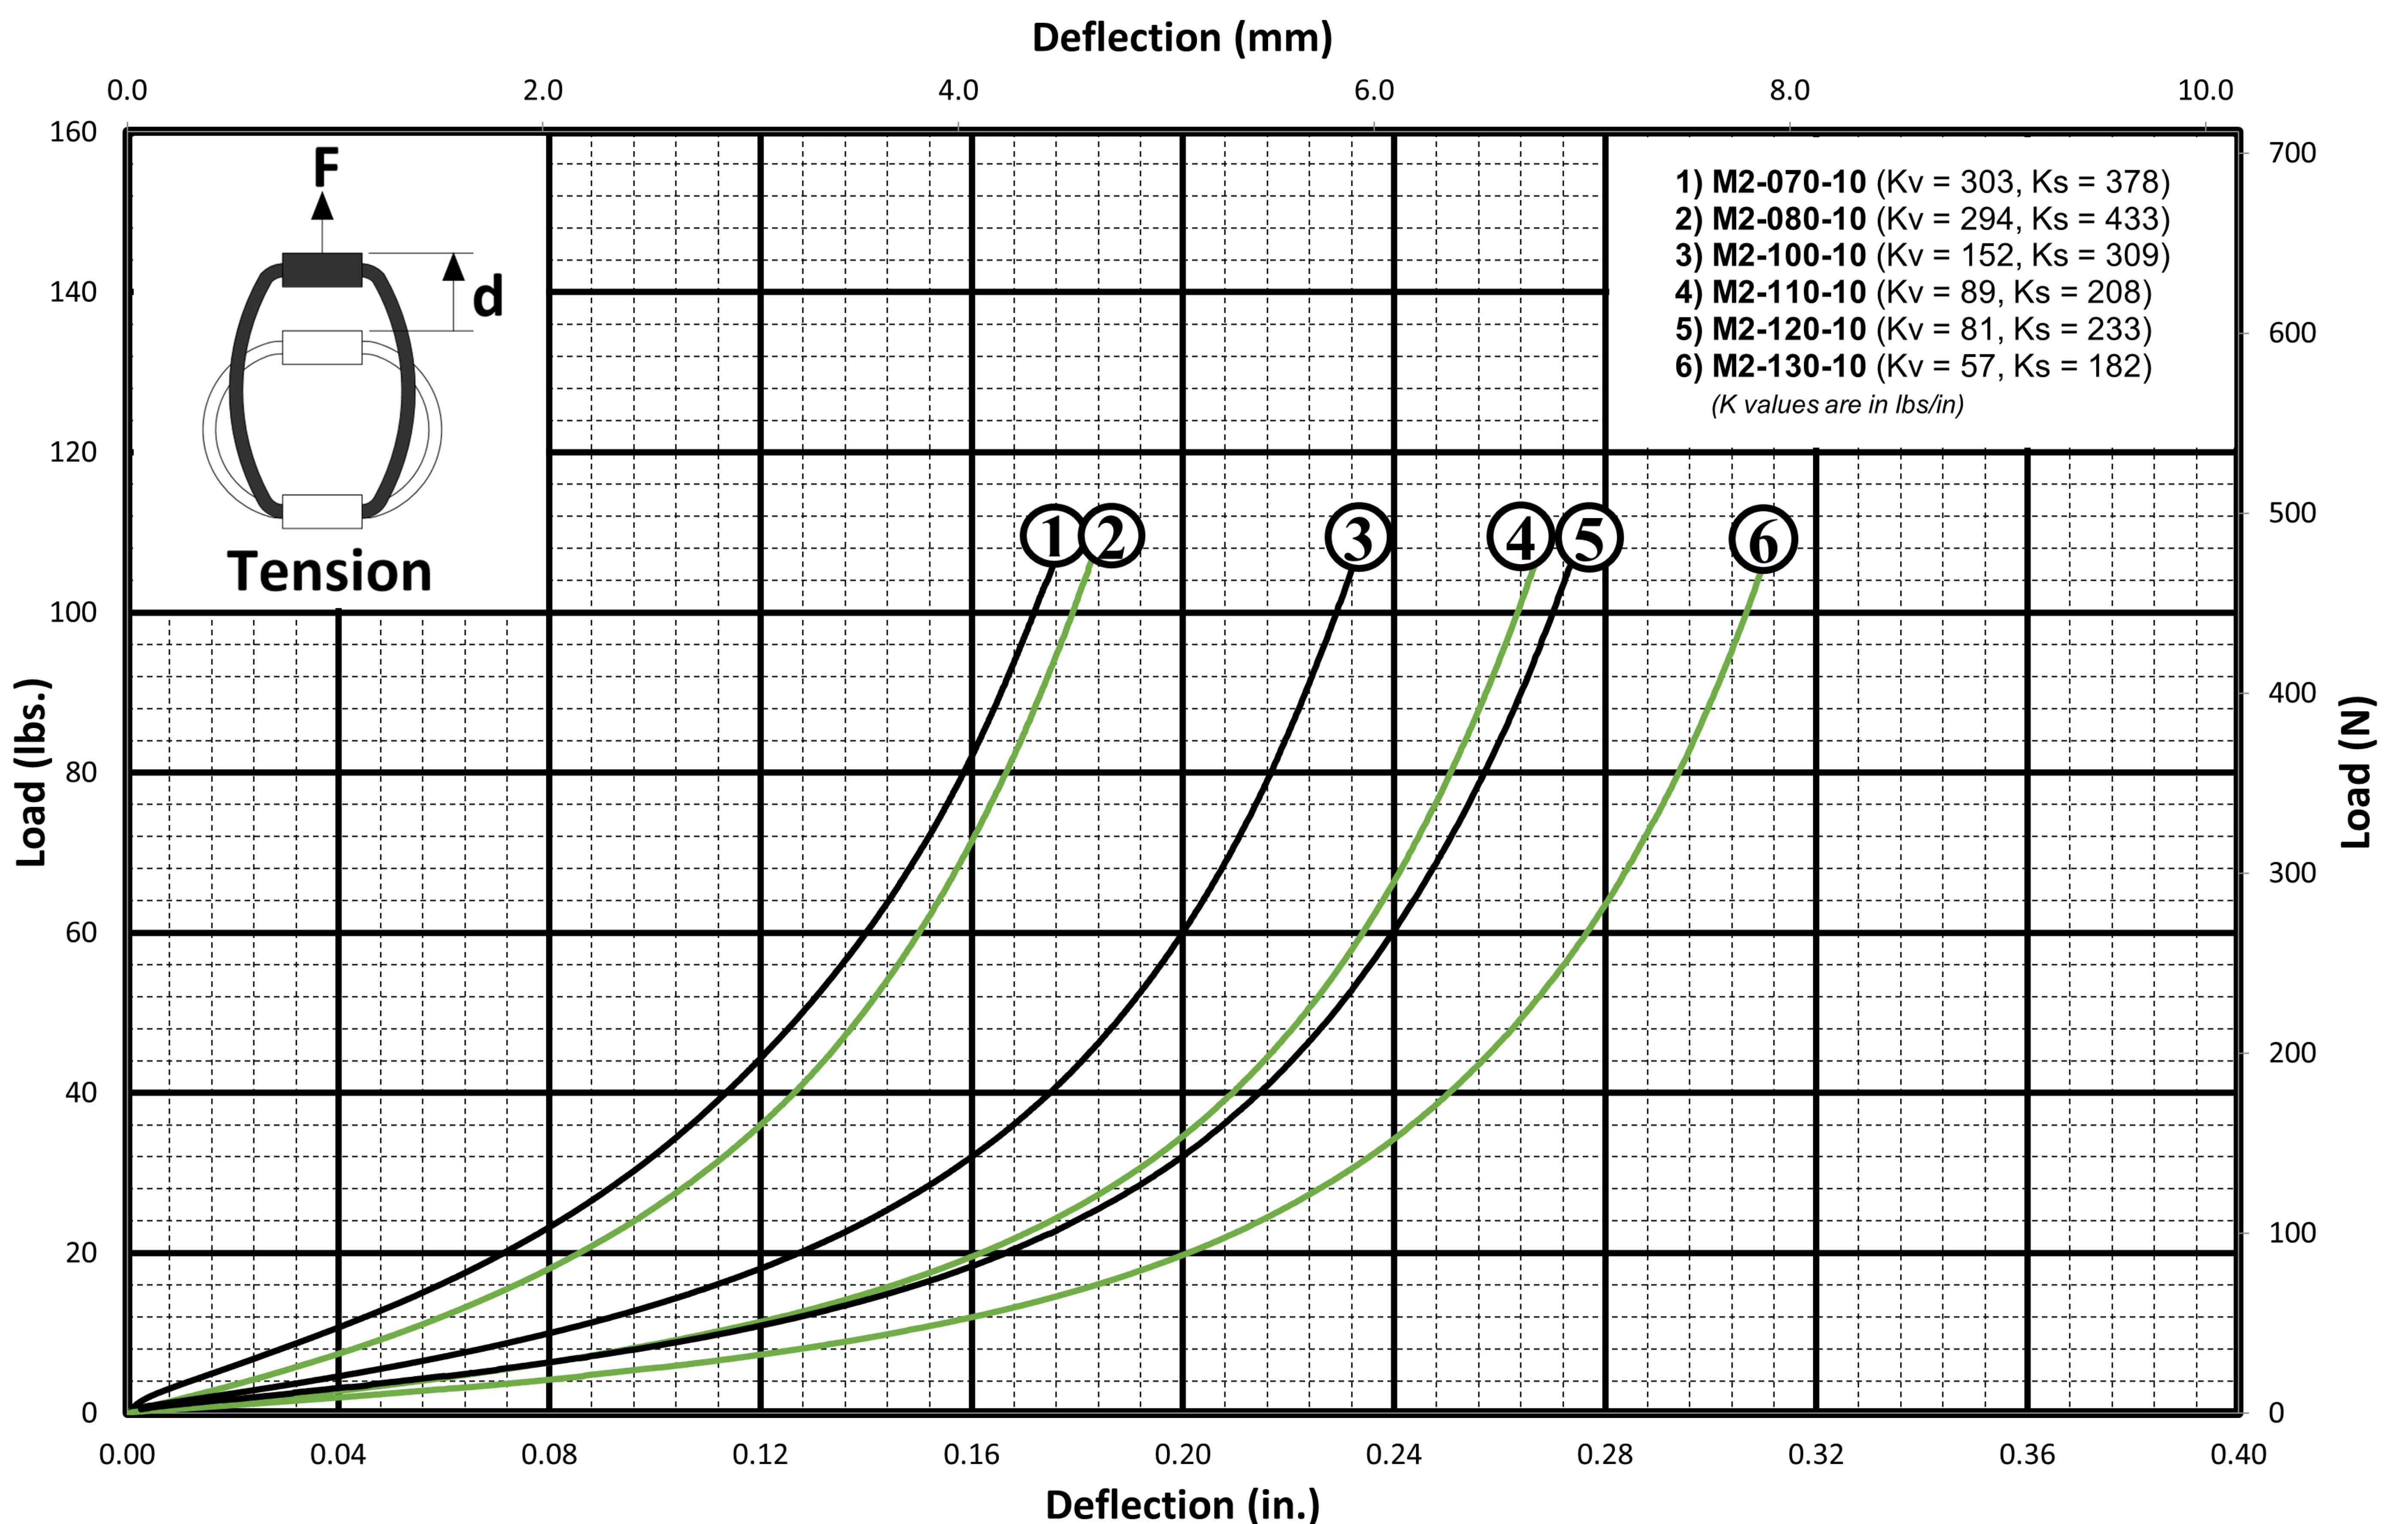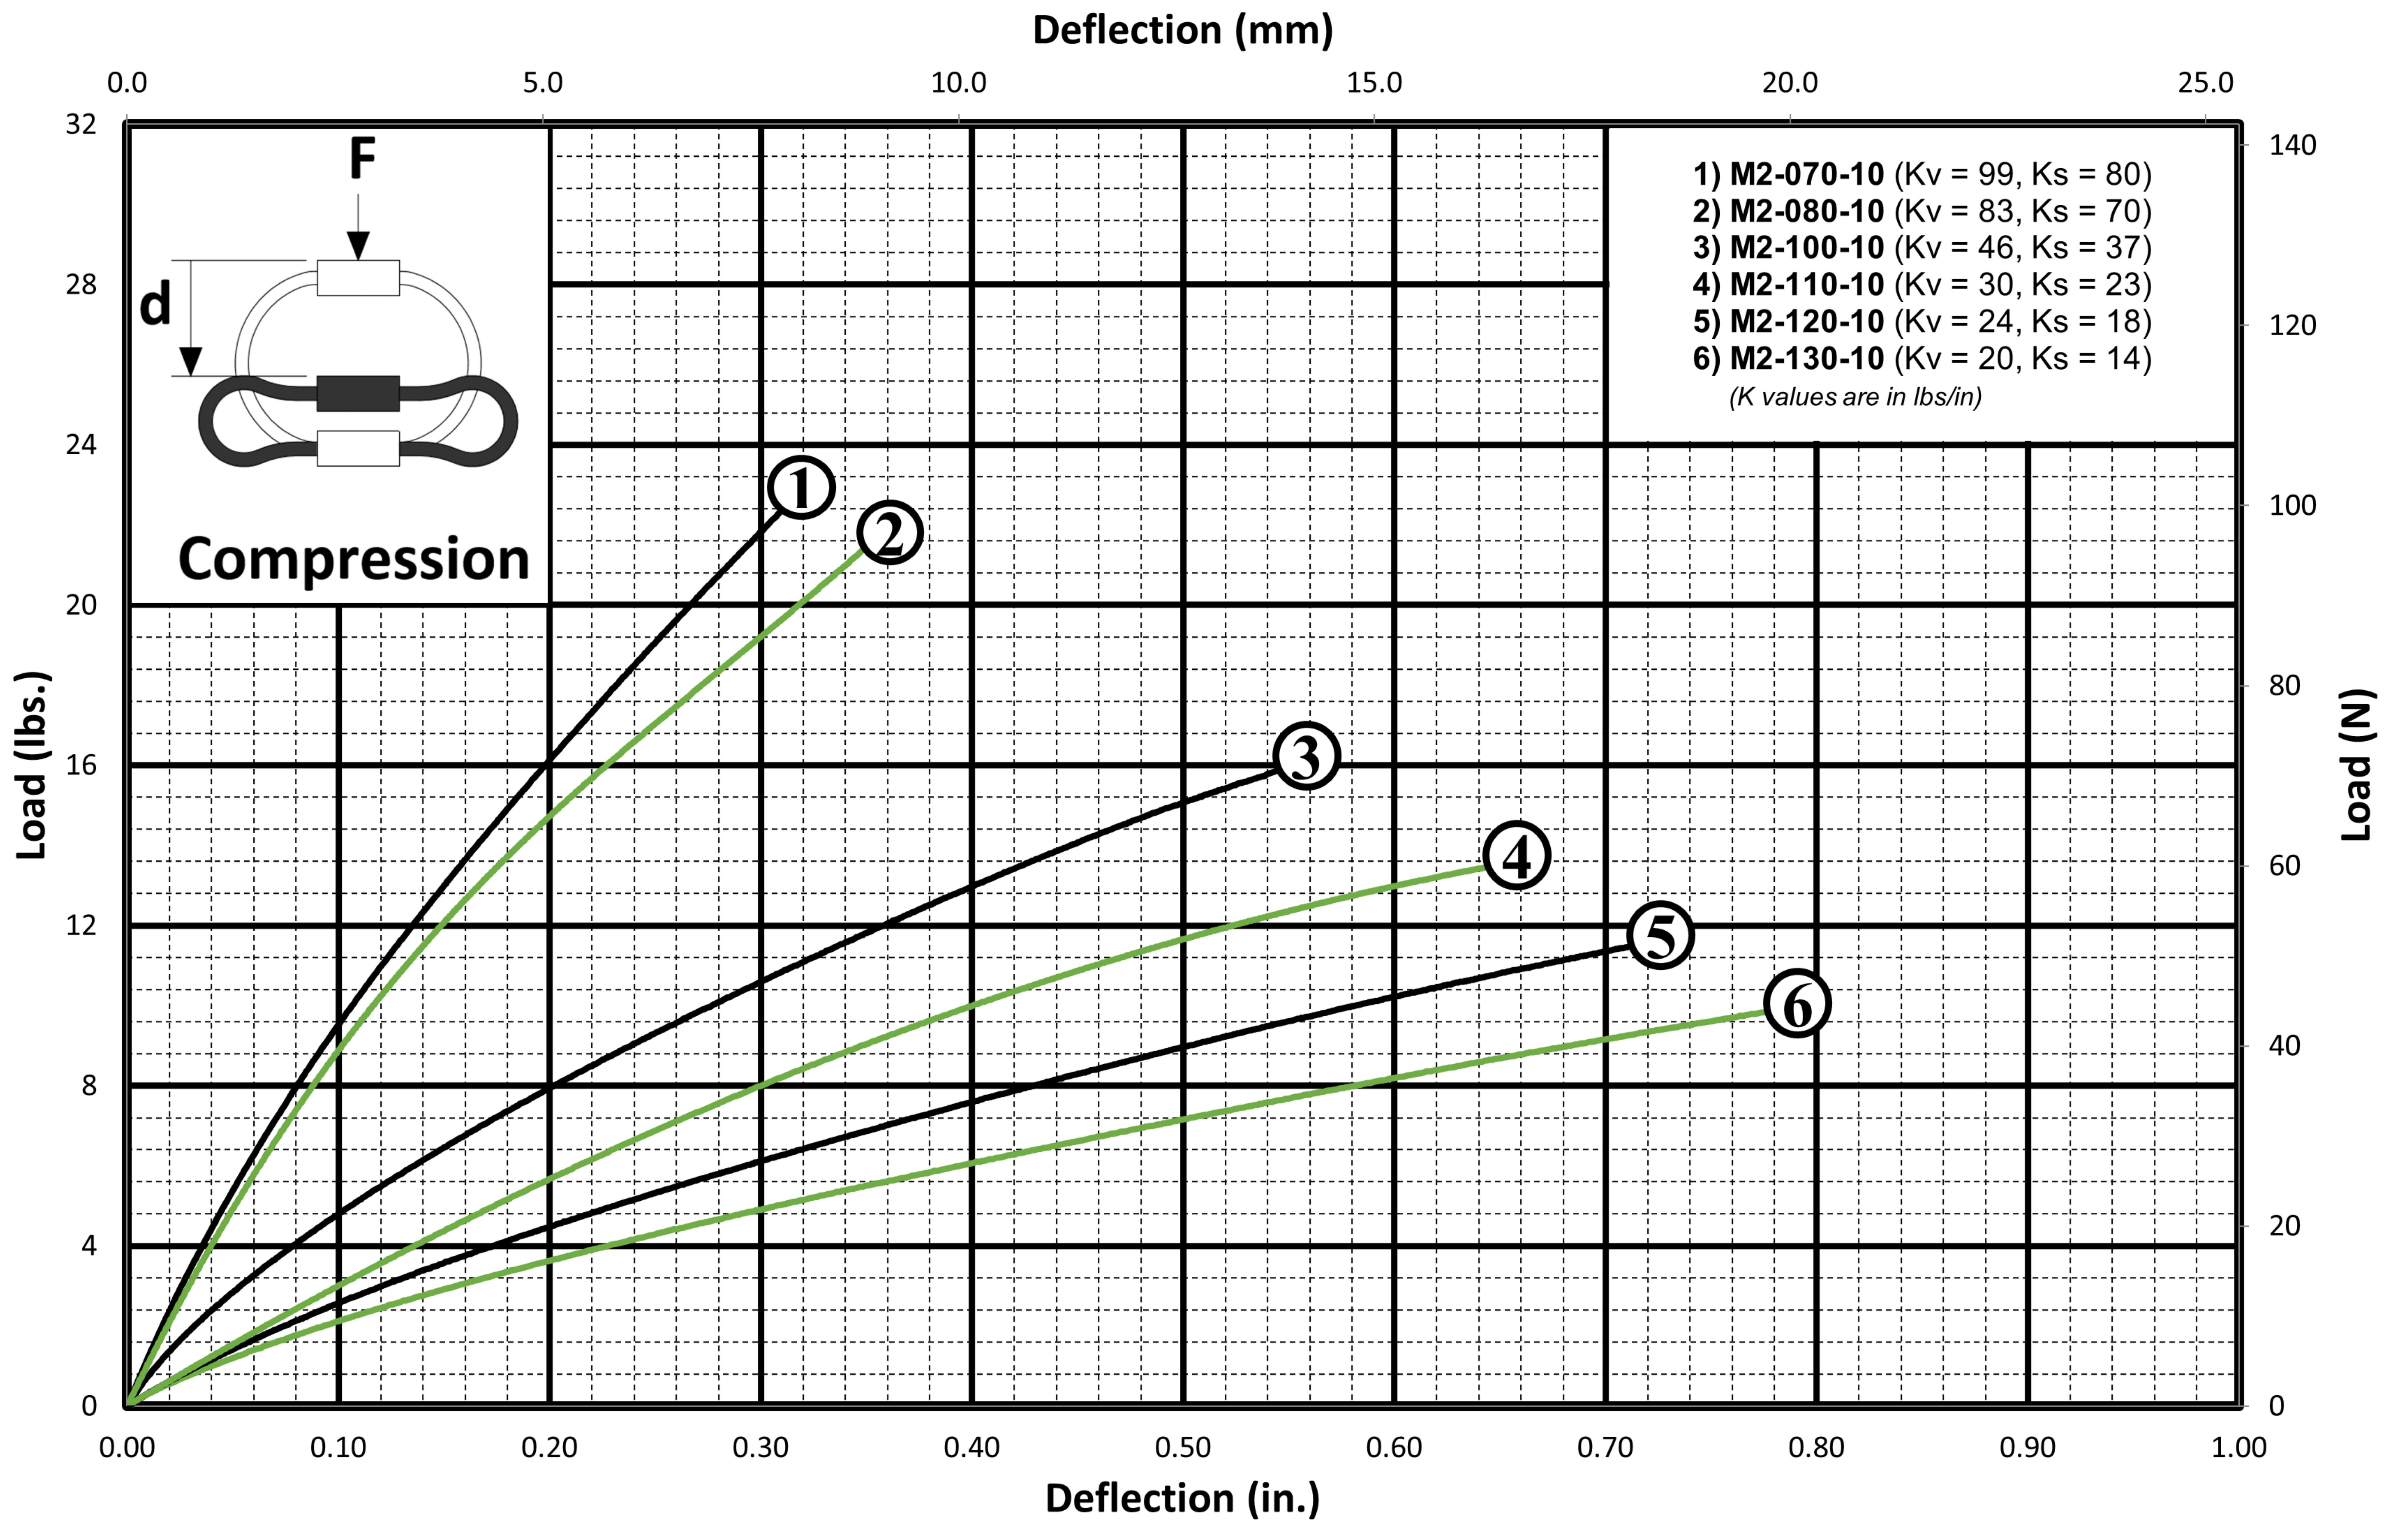

1/16" DIAMETER CABLE

HELICAL ISOLATOR

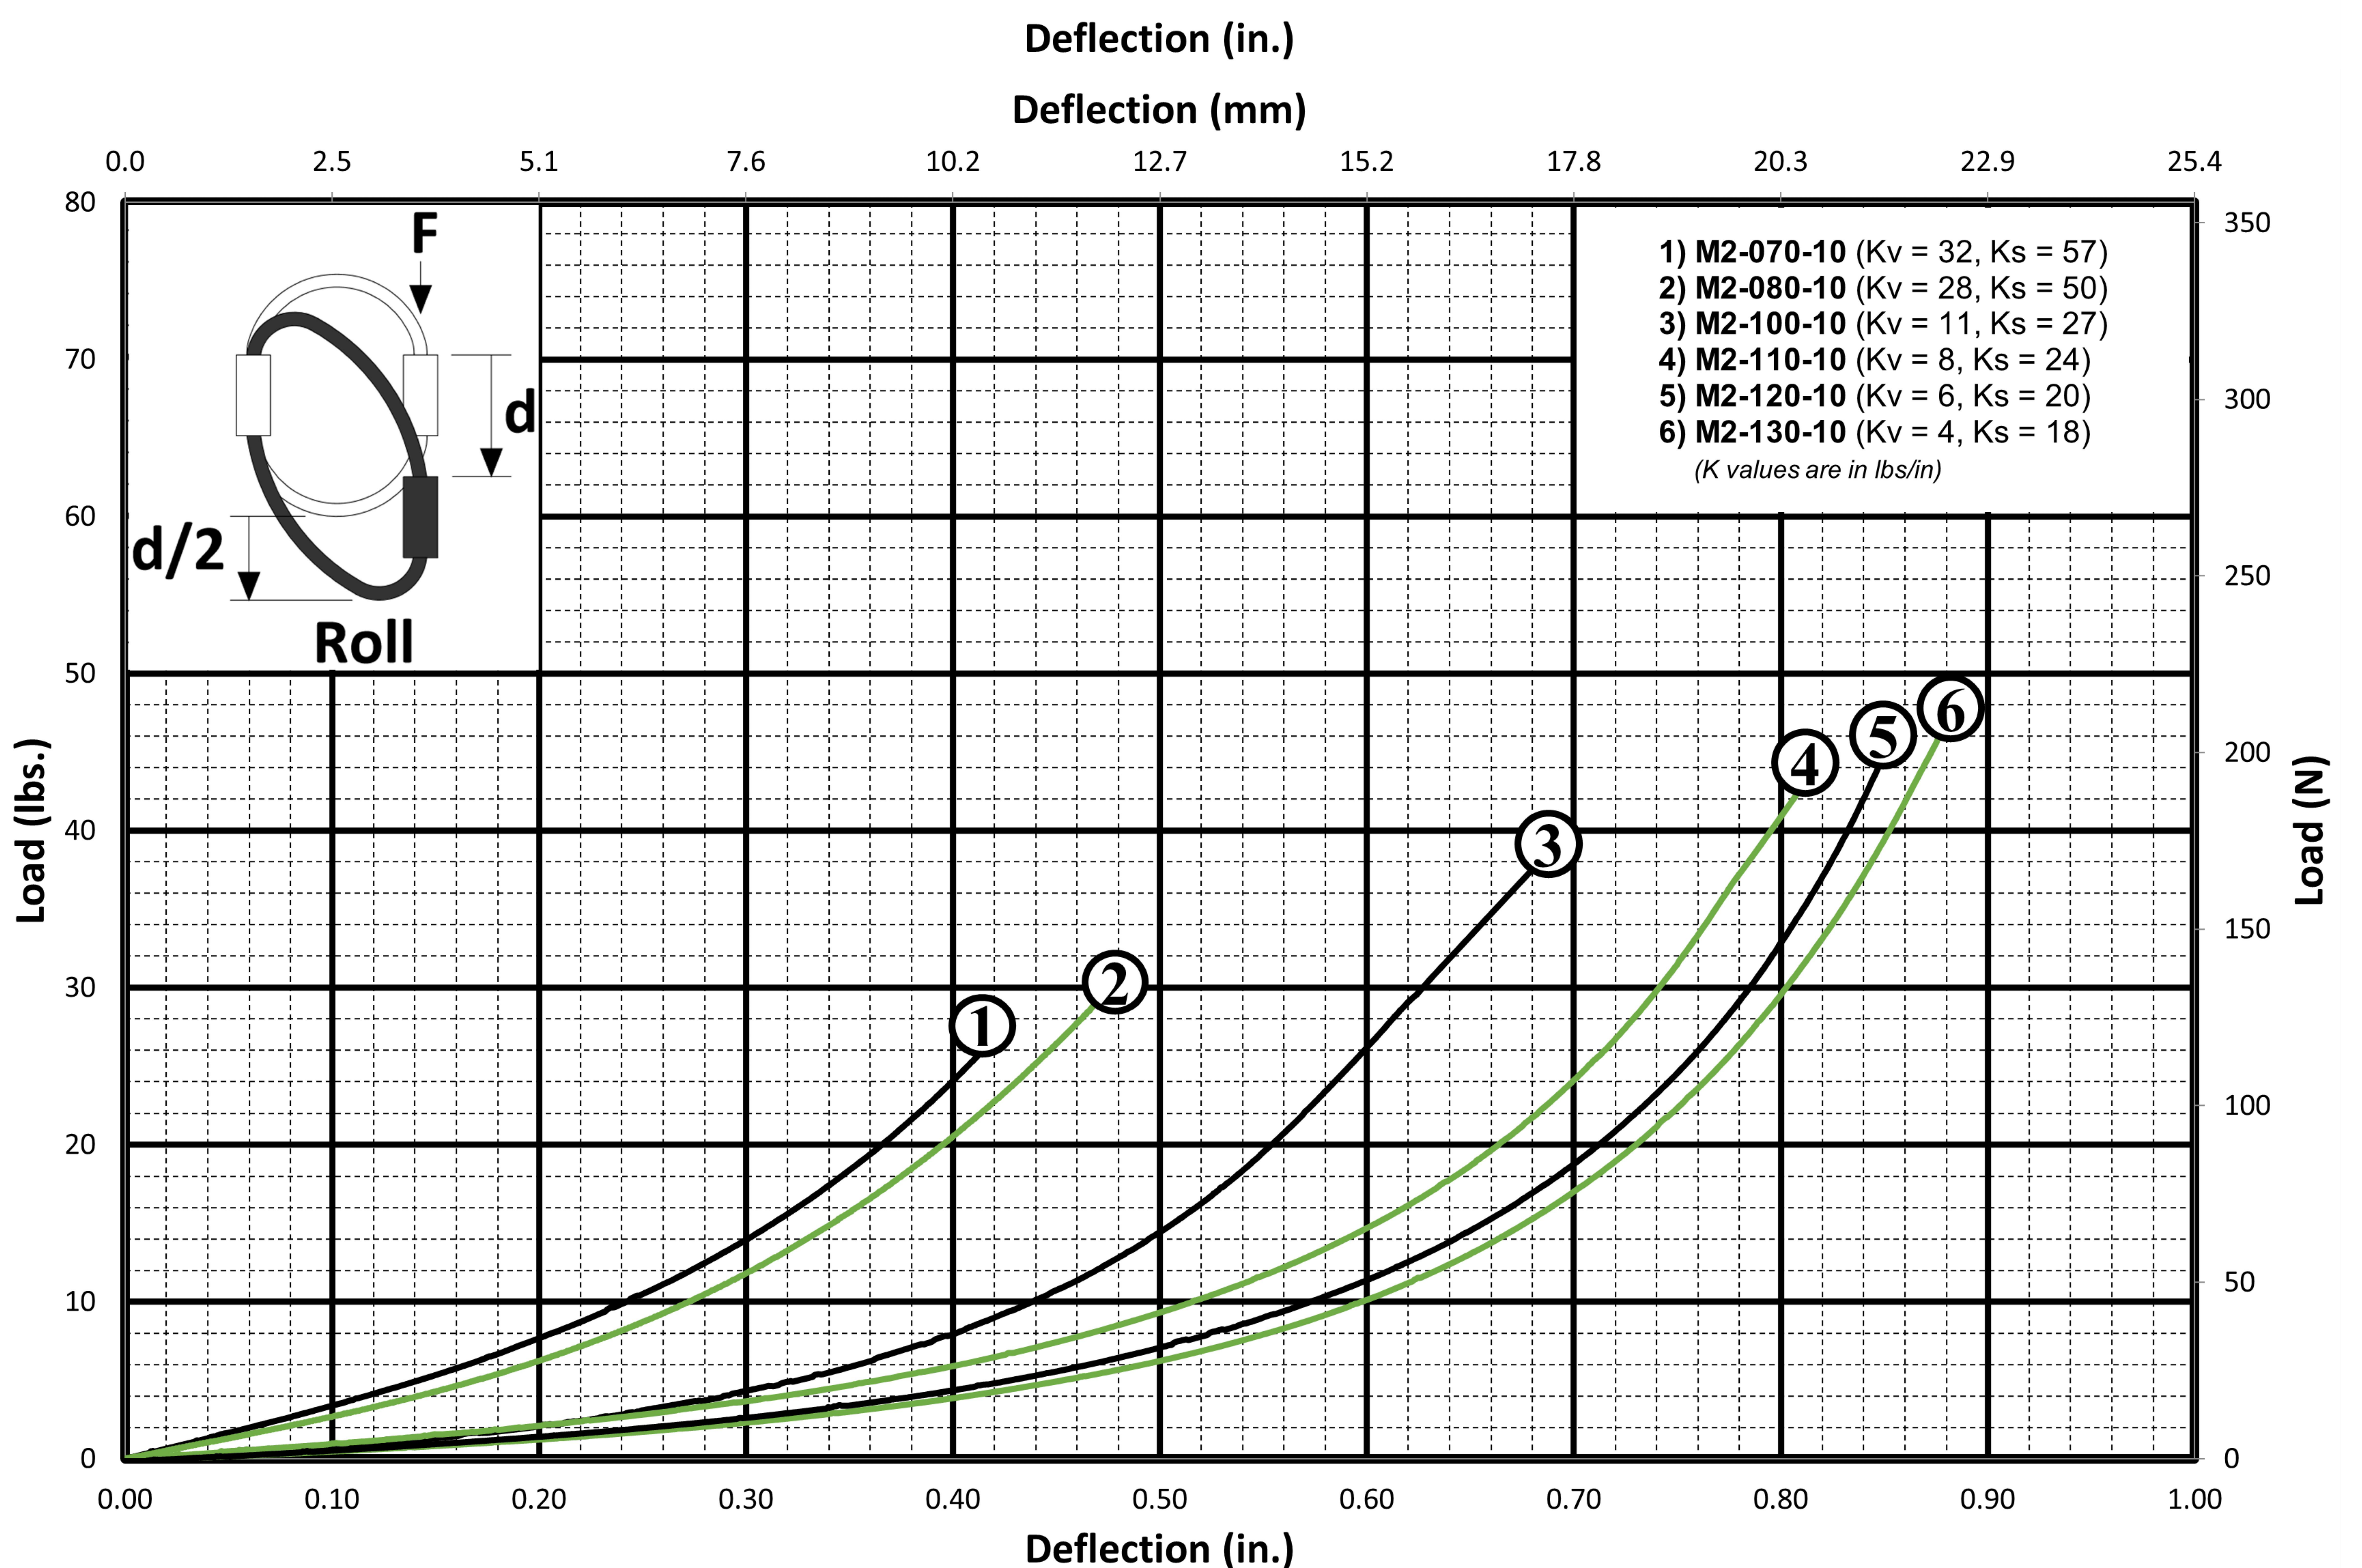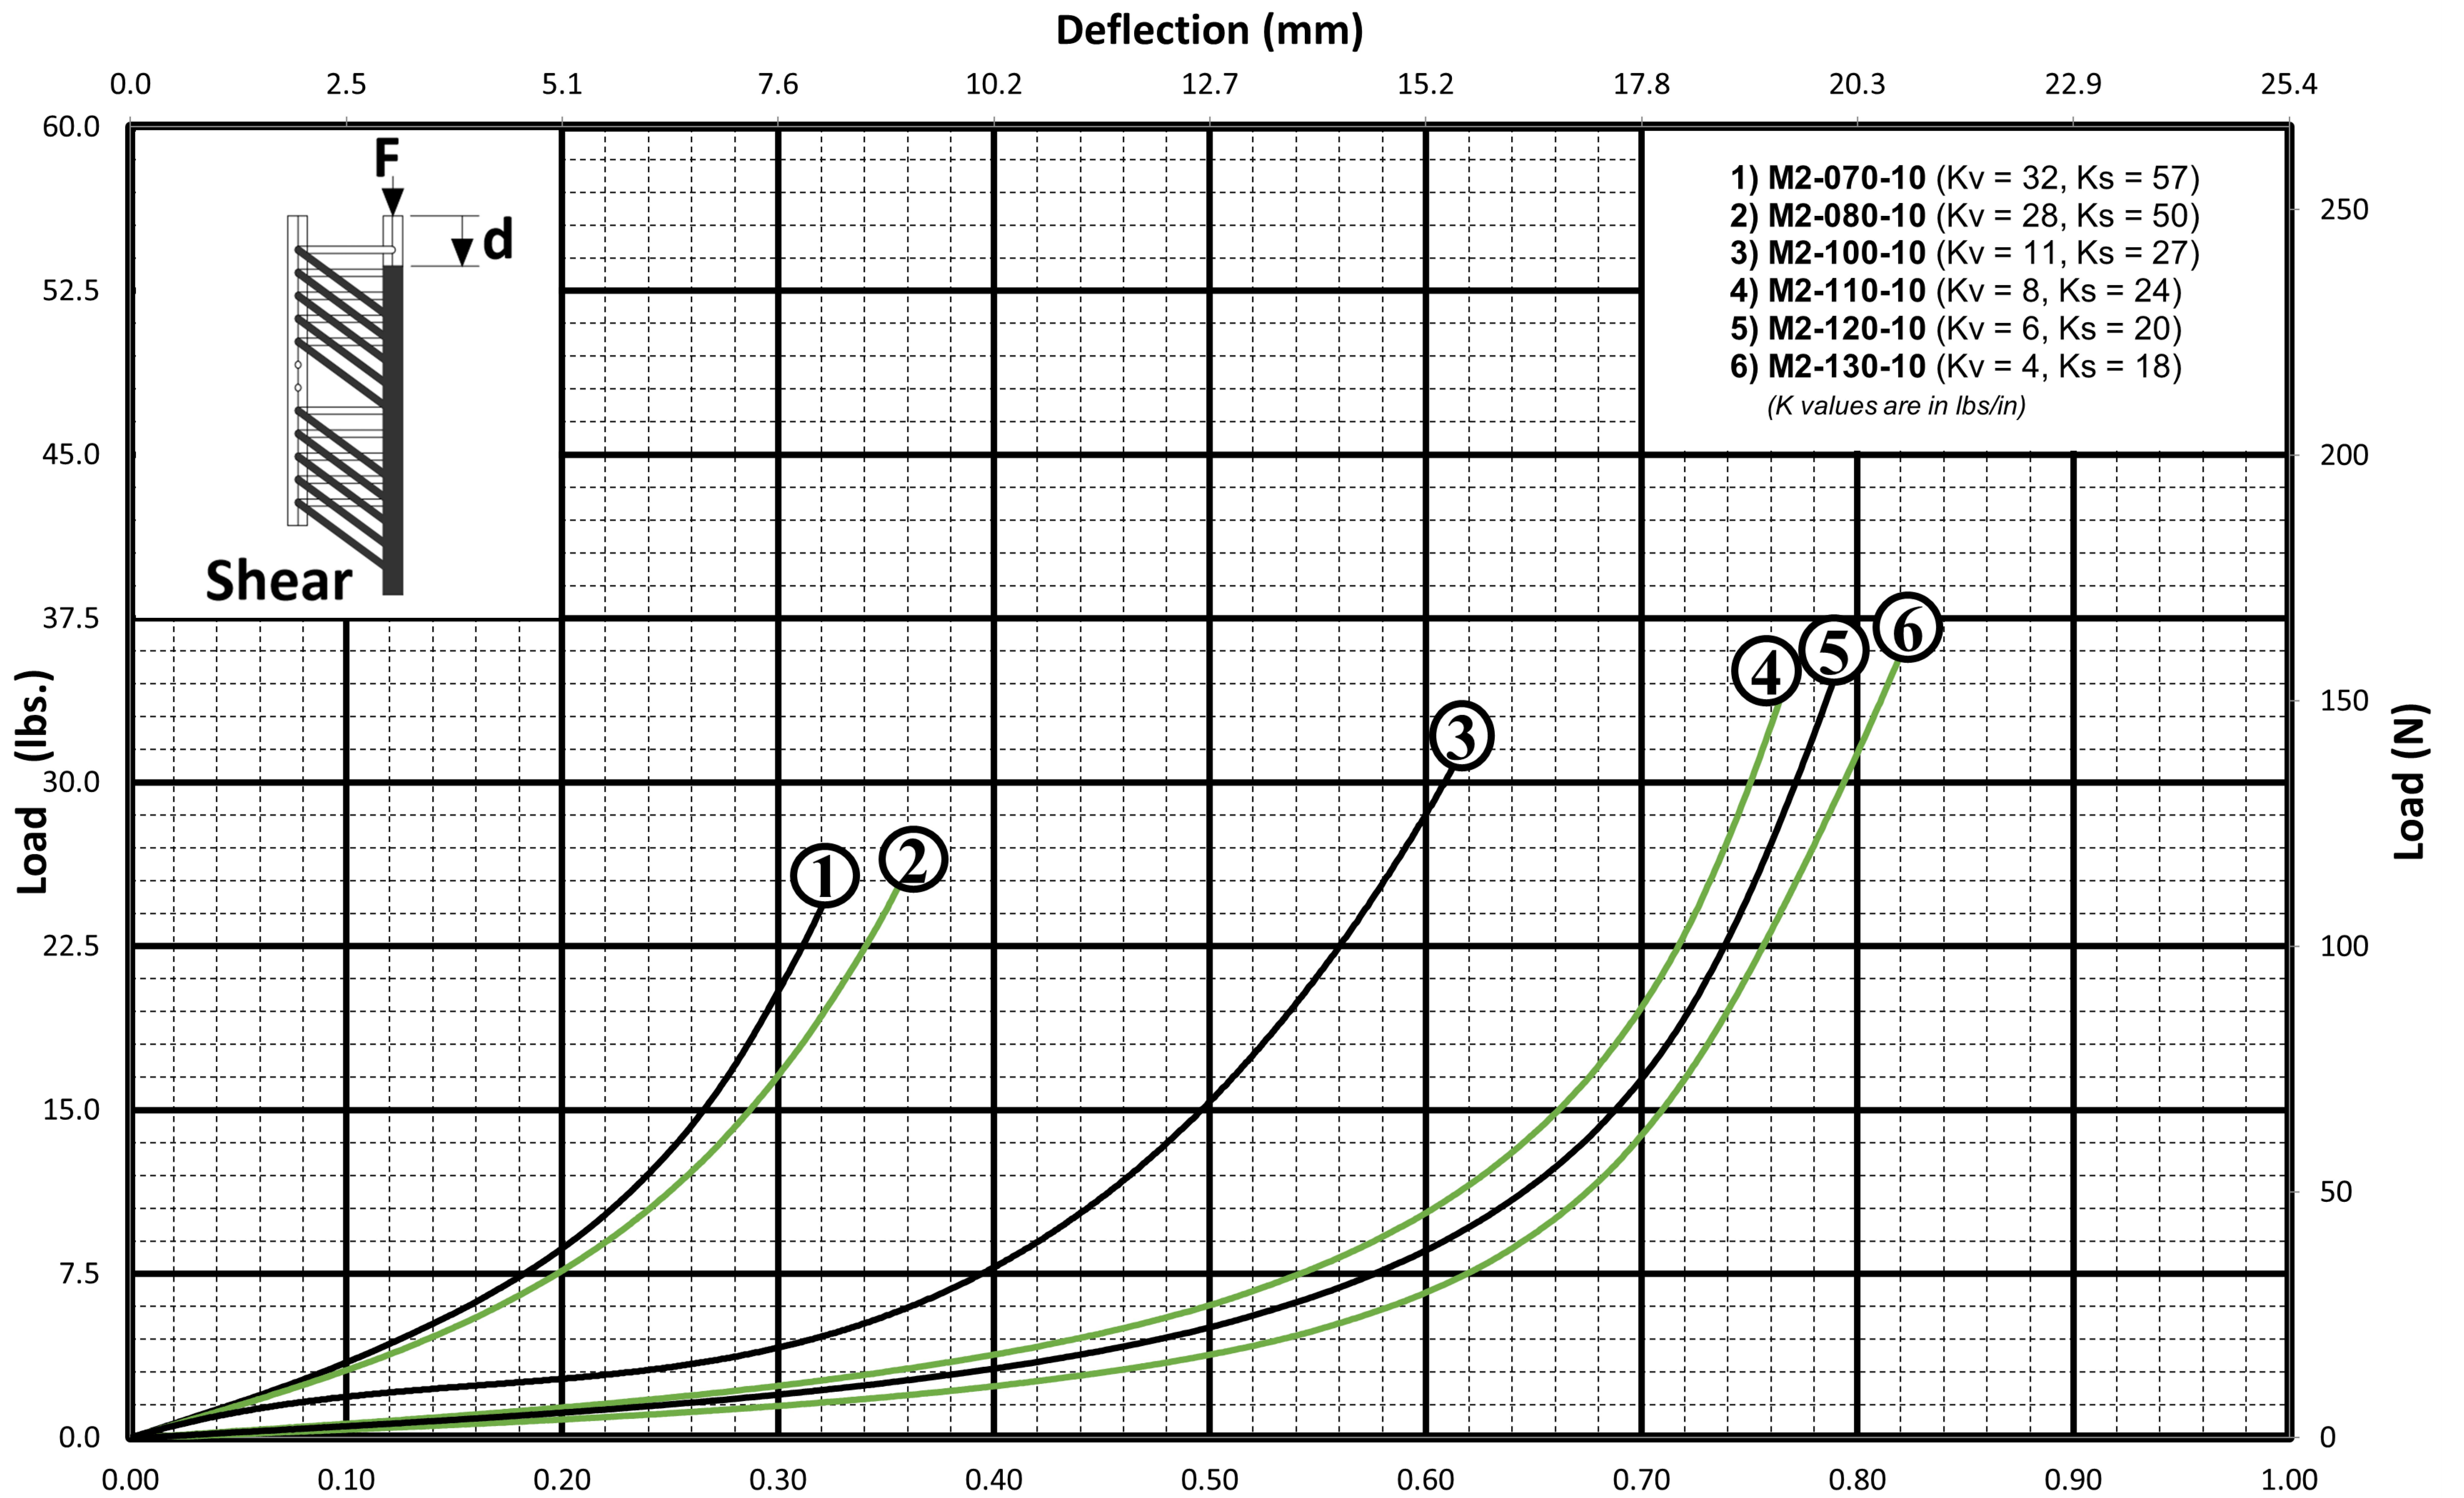

1/16" DIAMETER CABLE

HELICAL ISOLATOR

